


www.erreka-automation.com



SLIDING GATE MOTOR

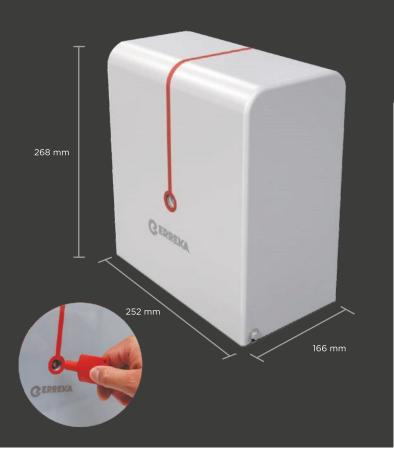

RECOMMENDED ACCESSORIES

Nylon rack

N2113 - 1 m

Receiver	Transmite
IRRE2-250	LUNA
IRIN2S-250	IRIS

LIRA

Flashing lamp

Photocells

Magnetic metal lop

Batteries














Adjustable pinion to rack misalignments Silent and powerful Smooth opening and closing slow down Programming by display Safety with obstacle detection Back-up batteries Electronic limit switch Manual release

TECHNICAL FEATURES:

	DNS424
Power supply	220/50-60
Absorbed power (W)	250
Max. gate lenght (W)	24
Max. gate weight (kg)	400
Maximal power (W)	15
Usage (cycle/h)	40
90° opening time (s)	15.0
Maximum opening angle (°)	M4-Z12
Maximum travel (mm)	44
Degree of protection (IP)	-20 / +60
Operating temperature (°C)	Si
Operator weight (kg)	6.0
Application	Residencial

COMPLETE INSTALLATION

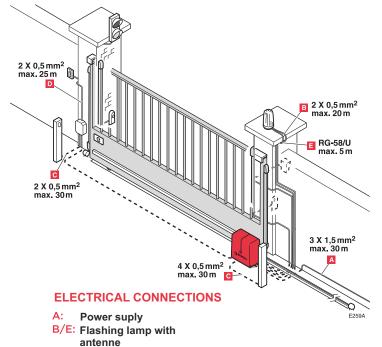

C: Photocells (Tx/ Rx)

D: Push button /key switch